



TOTALINE® RUN CAPACITORS
OVAL MOTOR RUN CAPACITORS


- Non-pcb dielectric fluid
- UL approved current interrupter
- Multiple electrical terminals

PART NO. SIGNIFICANCE




VAC: R = ROUND
 NO LETTER = OVAL

1 =
 2 =
 3 = 370
 4 = 440
 5 =
 6 =
 7 = 740
 8 =
 9 =



370 VOLT SINGLE



PART NO	MAX CAN HEIGHT (in)	MFD
P291-0303	2.12	3
P291-0403	2.7	4
P291-0503	2.7	5
P291-0753	3.6	7.5
P291-1003	4	10
P291-1253	4.9	12.5
P291-1503	5.6	15
P291-1753	4.9	17.5
P291-2003	4.9	20
P291-2503	0.4	25
P291-3003	4.9	30
P291-3503	5.4	35
P291-4003	4.9	40
P291-4503	5.3	45
P291-5003	5.9	50
P291-5503	5.9	55

440 VOLT SINGLE

PART NO	MAX CAN HEIGHT (in)	MFD
P291-0204	2.12	2
P291-0304	2.12	3
P291-0404	3.1	4
P291-0504	3.6	5
P291-0754	5	7.5
P291-1004	4.9	10
P291-1254	4.9	12.5
P291-1504	5.3	15
P291-1754	6.3	17.5
P291-2004	4.9	20
P291-2504	5.3	25
P291-3004	5.9	30
P291-3504	5.9	35
P291-4004	4.9	40
P291-4504	4.9	45
P291-5004	5.9	50
P291-5504	5.9	55

740 VOLT SINGLE

PART NO	MAX CAN HEIGHT (in)	MFD
P291-1257	9	12.5

370 VOLT DUAL

PART NO	MFD		MAX CAN HEIGHT (in)
	COMP	FAN	
P291-0323	3	2	2.8
P291-1553	15	5	3.9
P291-1573	15	7.5	4.9
P291-1513	15	10	6.8
P291-1523	15	12.5	5.9
P291-1743	17.5	4	5.8
P291-2053	20	5	4
P291-2013	20	10	7.7
P291-2533	25	3	4.7
P291-2543	25	4	4.9
P291-2553	25	5	4.9
P291-2573	25	7.5	4.9
P291-2513	25	10	5.3
P291-2523	25	12.5	4.9
P291-3053	30	5	4.9
P291-3073	30	7.5	4.9
P291-3013	30	10	5.1
P291-3543	35	4	4.7
P291-3553	35	5	4.9
P291-3573	35	7.5	4.9
P291-3523	35	12.5	4.9
P291-4053	40	5	5.4
P291-4073	40	7.5	5.4
P291-4013	40	10	5.3
P291-4553	45	5	5.9
P291-4573	45	7.5	5.9
P291-4513	45	10	5.9
P291-5053	50	5	5.7
P291-5553	55	5	5.3



440 VOLT DUAL

PART NO	MFD		MAX CAN HEIGHT (in)
	COMP	FAN	
P291-1534	15	3	6
P291-1554	15	5	4.9
P291-2054	20	5	4.9
P291-2074	20	7.5	5.4
P291-2554	25	5	5.9
P291-2574	25	7.5	5.9
P291-3054	30	5	5.9
P291-3074	30	7.5	5.9
P291-3014	30	10	4.7
P291-3554	35	5	5.9
P291-3574	35	7.5	5.9
P291-3514	35	10	5.9
P291-4054	40	5	5.9
P291-4074	40	7.5	5.9
P291-4014	40	10	5.3
P291-4554	45	5	5.9
P291-5014	50	10	5.3
P291-5054	50	5	5.3

TOTALINE® RUN CAPACITORS

ROUND MOTOR RUN CAPACITORS

- Non-pcb dielectric fluid
- UL approved current interrupter
- Multiple electrical terminals

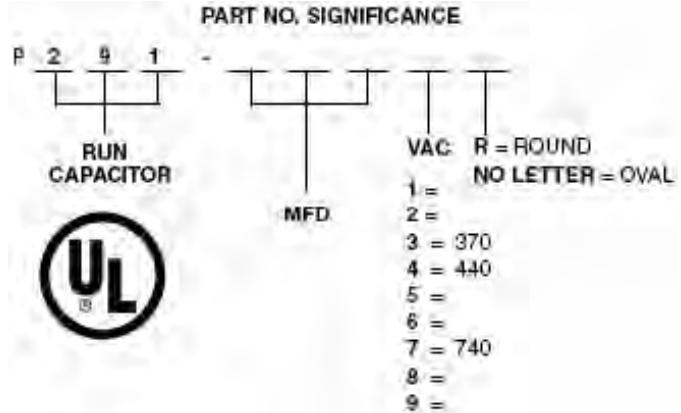


370 VOLT SINGLE

PART NO	MAX CAN HEIGHT (in)	MFD
P291-0503R	2.9	5
P291-1003R	2.9	10
P291-1503R	3.7	15
P291-3003R	6.8	30
P291-3503R	3.9	35
P291-5003R	5.2	50

440 VOLT SINGLE

PART NO	MAX CAN HEIGHT (in)	MFD
P291-6004R	-	60
P291-4504RS	-	40



370 VOLT DUAL

PART NO	COMP	FAN	MAX CAN HEIGHT (in)
P291-1553RS	15	5	5
P291-2053R	20	5	2.9
P291-2553RS	25	5	5.8
P291-2573R	25	7.5	5.4
P291-2513R	25	10	5.4
P291-3053RS	30	5	5.8
P291-3073R	30	7.5	5.8
P291-3553RS	35	5	6.4
P291-3573R	35	7.5	6.4
P291-4053RS	40	5	5
P291-4543R	45	4	6.9
P291-4553RS	45	5	6.9

440 VOLT DUAL

PART NO	COMP	FAN	MAX CAN HEIGHT (in)
P291-3054R	30	5	-
P291-1554RS	15	5	-
P291-5514RS	55	5.9	-